

# Optical Fiber Tapers

Fiberguide Industries

Acrylate Coated Silica/Silica

## Technical Data

### REFERENCE SUMMARY

**Product Category:**  
Fiber

**Mode:**  
Step Index, Multimode

**Type:**  
Optical Fiber Tapers



**Trade Name:**  
Acrylate Coated Silica/Silica

### DESCRIPTION

Tapered optical fibers can be made either by fusing a short tapered section onto a longer fixed diameter fiber, or, by very carefully controlling the drawing process to produce a single continuous fiber with an integral tapered section. Fiberguide used the latter process since it results in superior fiber strength, alignment precision and optical power transmission. Tapered optical fibers cause optical mode mixing that tends to homogenize spatial power distribution. A larger input core diameter can prevent input damage and allow a smaller diameter pigtail for convenience in adapting to a wide range of optical applications.

Tapered optical fibers can be used as a passive optical component to alter the input and / or output divergence (N.A.) with regard to an optical fiber, as a high power coupler for laser energy, as this will spread the energy over a larger area, or simply as a device to relax tolerances in an optical system. To ensure maximum efficiency of light transmission, the numerical aperture (N.A.) of the light entering the taper input should be 0.22 divided by the taper ratio. As an example, assume the input core diameter of the taper is 400µ and the output core is 200µ, which is a 2:1 taper ratio, and then the N.A. of the light entering the taper will be 0.22/2, or 0.11 N.A.

### FIBER CROSS SECTION

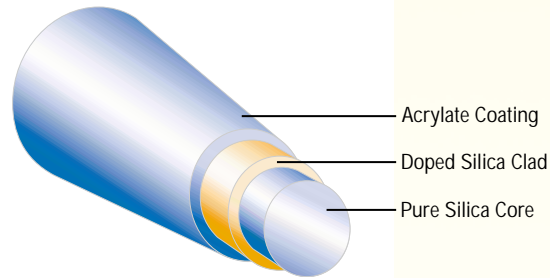

### FEATURES & BENEFITS

Features	Benefits
• Continuous length.	• No need to fuse two fibers together.
• Highest power handling and lowest loss.	• Fused tapers tend to have higher losses.
• Concentrates optical input into a smaller output area.	• Increased brightness.
• Causes optical mode mixing.	• Tends to homogenize spatial power distribution.

### APPLICATIONS

- Laser marking
- Laser welding and soldering
- Fluid level sensors
- Laser surgery, angioplasty, lithotripsy
- Non-linear optics
- Diode laser array coupling
- Spectroscopy, analytical instruments, laser delivery
- Biosensors
- Near-Field Scanning Optical Microscopy/Raman and IR Spectroscopy
- Humidity sensing
- Delivery systems for laser diode
- High power laser transmittance
- Dynamic position sensing
- Fluorescent detection

Fiberguide Industries, Inc., 1 Bay Street, Stirling, NJ 07980  
Phone: 908-647-6601 Fax: 908-647-8464 info@fiberguide.com www.fiberguide.com

Form No: REF 723 DS011, Rev. 1/4/2010, Printed in the U.S.A.  
© Copyright 2007 Fiberguide Industries, Inc., Specifications subject to change without notice.



A HALMA COMPANY

# Optical Fiber Tapers

Fiberguide Industries

Acrylate Coated Silica/Silica

## Technical Data

### REFERENCE SUMMARY



Product Category:  
Fiber

Mode:  
Step Index, Multimode

Type:  
Optical Fiber Tapers


Trade Name:  
Acrylate Coated Silica/Silica

### TYPICAL EXAMPLES

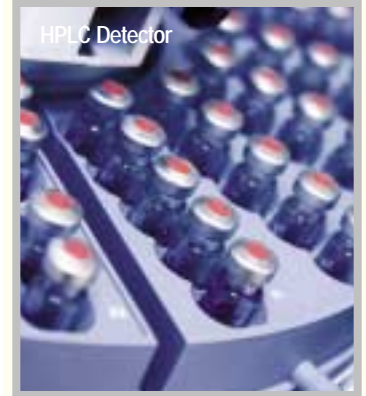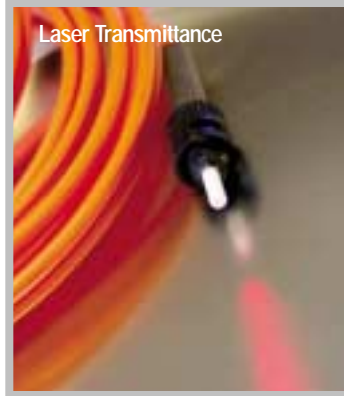

### SPECTRAL ATTENUATION (Typical)

#### Superguide™ Series

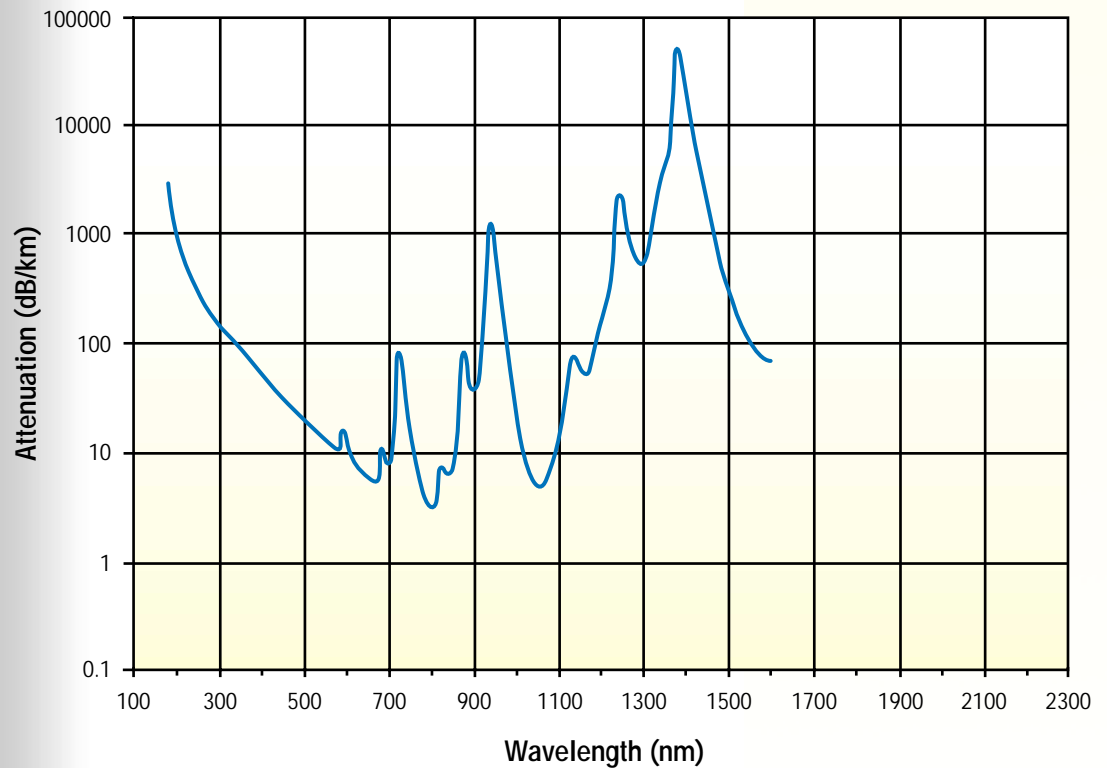

A HALMA COMPANY

Fiberguide Industries, Inc., 1 Bay Street, Stirling, NJ 07980  
Phone: 908-647-6601 Fax: 908-647-8464 info@fiberguide.com www.fiberguide.com

Form No: REF 723 DS011, Rev. 1/4/2010, Printed in the U.S.A.  
© Copyright 2007 Fiberguide Industries, Inc., Specifications subject to change without notice.

# Optical Fiber Tapers

Fiberguide Industries

Acrylate Coated Silica/Silica

## Technical Data

### REFERENCE SUMMARY


Product Category:  
Fiber

Mode:  
Step Index, Multimode,  
Graded Index, Single Mode

Type:  
Optical Fiber Tapers

Trade Name:  
Acrylate Coated Silica/Silica

### SPECTRAL ATTENUATION (Typical)

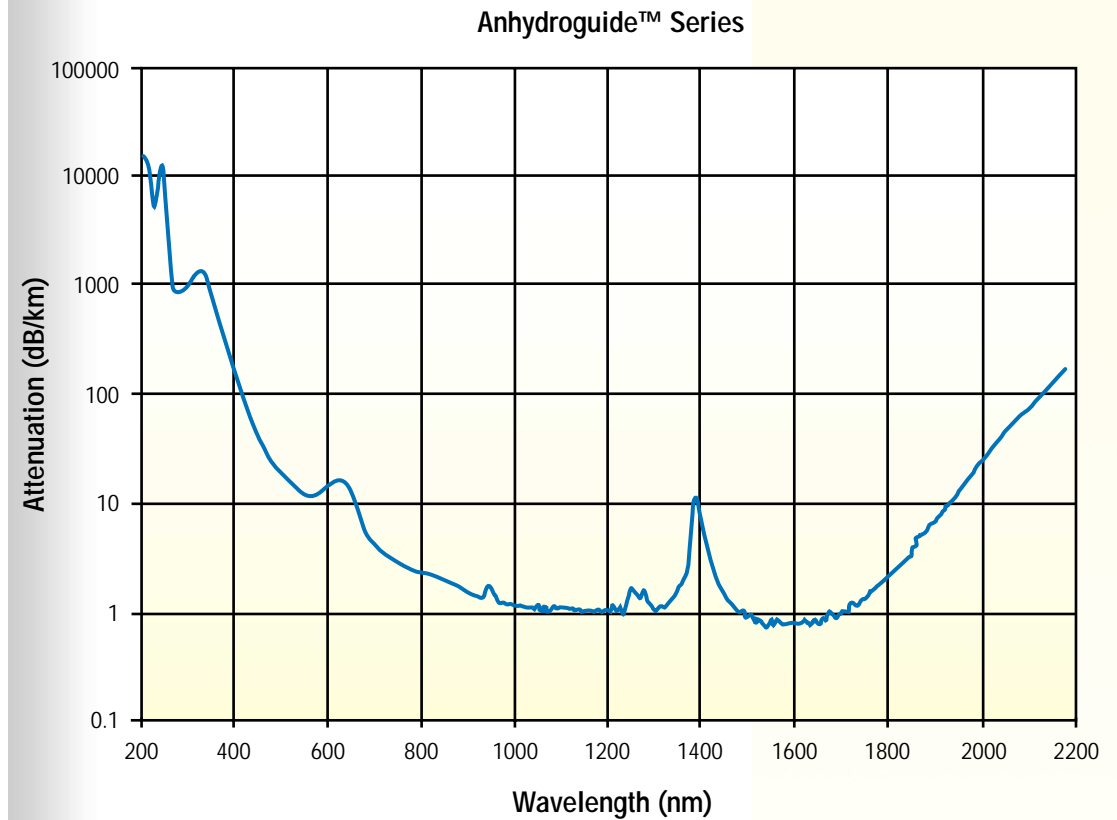

A HALMA COMPANY

Fiberguide Industries, Inc., 1 Bay Street, Stirling, NJ 07980  
Phone: 908-647-6601 Fax: 908-647-8464 info@fiberguide.com [www.fiberguide.com](http://www.fiberguide.com)

Form No: REF 723 DS011, Rev. 1/4/2010, Printed in the U.S.A.  
© Copyright 2007 Fiberguide Industries, Inc., Specifications subject to change without notice.

# Optical Fiber Tapers

Fiberguide Industries

Acrylate Coated Silica/Silica

## Technical Data

### REFERENCE SUMMARY


**Product Category:**  
Fiber

**Mode:**  
Step Index, Multimode,  
Graded Index, Single Mode

**Type:**  
Optical Fiber Tapers

**Trade Name:**  
Acrylate Coated Silica/Silica

### TAPERED OPTICAL FIBER EXAMPLE

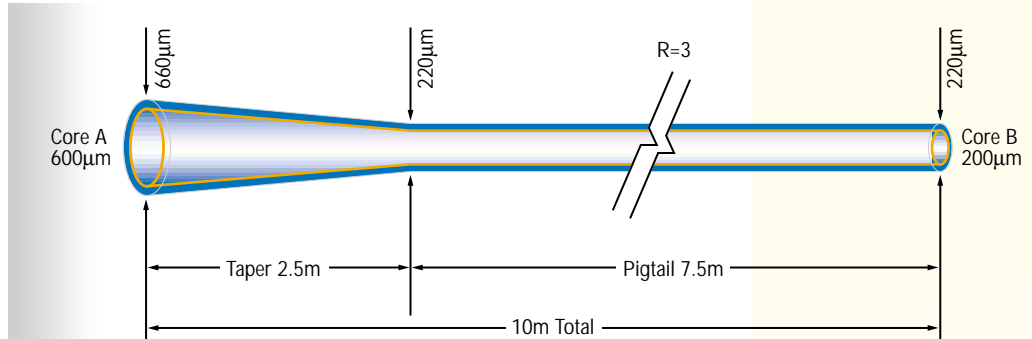

### NUMERICAL APERTURE

A fiber optic taper is a numerical aperture (N.A.) converter which converts the input beam N.A. by the following formula; however the maximum output N.A. is the pigtail N.A.

$$NA_o = (R * NA_i)$$

Where:  $NA_i$  = Input N.A.

$NA_o$  = Output N.A.

$R$  = Ratio of taper input diameter to output diameter

### FIBER SPECIFICATIONS

- Standard Numerical Aperture (N.A.):  $0.22 \pm 0.02$  (Full Acceptance Angle  $25^\circ$ )
- Available Numerical Apertures:  $0.12$  (Full Acceptance Angle  $14^\circ$ ),  $0.26$  (Full Acceptance Angle  $30^\circ$ )
- Standard Core-to-Clad Ratio 1.1
- Available Core-to-Clad Ratios 1.2 and 1.4 (Please Contact Our Customer Department)
- Buffer Material: Acrylate
- Input-to-Output Ratios: Up to 3:1
- Input Core Diameters:  $100\mu$  to  $600\mu$
- Taper Lengths:
  - Tapered Lengths: 1 to 3 Meters
  - Pigtail Lengths: Any Specified Length  $\leq 50$  Meters
  - Overall Length: 3 to 10 Meters (Typical)
- For Sizes Not Found Please Contact Our Customer Service Department

**Note:** The fibers in the following table carry a designation "SFT" standing for "Superguide series Fiber Taper" and "AFT" standing for "Anhydroguide series Fiber Taper" followed by the large core diameter and small core diameter (in microns) and concluding with the suffix "Y" designating Acrylate buffer/coating.



A HALMA COMPANY

Fiberguide Industries, Inc., 1 Bay Street, Stirling, NJ 07980

Phone: 908-647-6601 Fax: 908-647-8464 info@fiberguide.com www.fiberguide.com

Form No: REF 723 DS011, Rev. 1/4/2010, Printed in the U.S.A.

© Copyright 2007 Fiberguide Industries, Inc., Specifications subject to change without notice.

# Optical Fiber Tapers

Fiberguide Industries

Acrylate Coated Silica/Silica

## Technical Data

### REFERENCE SUMMARY

**Product Category:**  
Fiber

**Mode:**  
Step Index, Multimode

**Type:**  
Optical Fiber Tapers

**Trade Name:**  
Acrylate Coated Silica/Silica

### FIBER SPECIFICATIONS

#### Standard OH Plastic Coated Silica/Silica

Product Code	SFT100T050Y	SFT200T0100Y	SFT300T0100Y
Core A Diameter	100 $\mu\text{m} \pm 2\%$	200 $\mu\text{m} \pm 2\%$	300 $\mu\text{m} \pm 2\%$
Core B Diameter	50 $\mu\text{m} \pm 2\%$	100 $\mu\text{m} \pm 2\%$	100 $\mu\text{m} \pm 2\%$
Operating Wavelength	180nm - 1100nm	180nm - 1100nm	180nm - 1100nm

#### Standard OH Plastic Coated Silica/Silica

Product Code	SFT400T0200Y	SFT600T0200Y
Core A Diameter	400 $\mu\text{m} \pm 2\%$	600 $\mu\text{m} \pm 2\%$
Core B Diameter	200 $\mu\text{m} \pm 2\%$	200 $\mu\text{m} \pm 2\%$
Operating Wavelength	180nm - 1100nm	180nm - 1100nm

#### Low OH Plastic Coated Silica/Silica

Product Code	AFT100T050Y	AFT200T0100Y	AFT300T0100Y
Core A Diameter	100 $\mu\text{m} \pm 2\%$	200 $\mu\text{m} \pm 2\%$	300 $\mu\text{m} \pm 2\%$
Core B Diameter	50 $\mu\text{m} \pm 2\%$	100 $\mu\text{m} \pm 2\%$	100 $\mu\text{m} \pm 2\%$
Operating Wavelength	400nm - 2400nm	400nm - 2400nm	400nm - 2400nm

#### Low OH Plastic Coated Silica/Silica

Product Code	AFT400T0200Y	AFT600T0200Y
Core A Diameter	400 $\mu\text{m} \pm 2\%$	600 $\mu\text{m} \pm 2\%$
Core B Diameter	200 $\mu\text{m} \pm 2\%$	200 $\mu\text{m} \pm 2\%$
Operating Wavelength	400nm - 2400nm	400nm - 2400nm

**Note:** Fiberguide can also furnish taper assemblies with custom machined ferrules or industry standard connectors and a wide variety of jackets designed for your specific application.

### Fiberguide Industries Customization Program

Fiberguide Industries is a full service custom fiber and value-added assembly provider. If you have unique requirements, please contact us to discuss tailoring a product or design to optimize optical performance for your specific application.

**Fiberguide Industries, Inc., 1 Bay Street, Stirling, NJ 07980**

**Phone: 908-647-6601 Fax: 908-647-8464 info@fiberguide.com www.fiberguide.com**

Form No: REF 723 DS011, Rev. 1/4/2010, Printed in the U.S.A.

© Copyright 2007 Fiberguide Industries, Inc., Specifications subject to change without notice.



A HALMA COMPANY