

**Fiber Type:**  
Step Index  
Multimode

**Fiber**


**Construction:**  
Silica Core/  
Polymer Clad/  
Polymer Coated

**Trade Name:**

Anhydroguide™  
VIS-IR (Low OH)  
300nm – 2400nm

Superguide™

UV-VIS (High OH)  
190nm – 1250nm

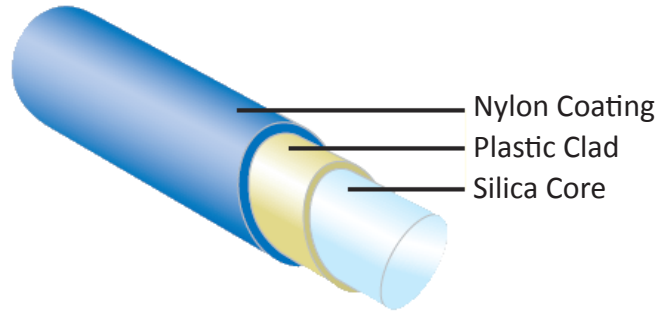

**Polymer Clad Fiber**

Fiberguide’s SPC & APC fibers feature a polymer cladding. This polymer cladding enables a NA of 0.37, but it differs from the hard polymer cladding because the polymer cladding offers better radiation stability making these fibers are the ideal choice for nuclear research and sensing applications.

**FIBER SPECIFICATIONS**

- Step Index Multimode
- Pure Fused Silica Core / Polymer Cladding
- Core / Cladding Sizes: 200/300µm to 2000/2150µm
- Numerical Aperture (NA):
  - o 0.37 (Up to 2 meter length)
  - o 0.23 (Over 50 meter length)

- Recommended Bend Radius:
  - o Short Term: 100 X Core Diameter
  - o Long Term: 200 X Core Diameter

Please note that these figures represent best practice recommendations. In applications where tighter bends are required, Fiberguide can assist you in estimating what impact they may have on fiber reliability.

- 100% Proof Test Using 4-Axis Bend Method
- Nylon certified to NAMS Class VI

**NA Note**

The theoretical numerical aperture for Silica Fibers, as calculated from the refractive indices of the core and cladding materials, only persists for short fiber lengths, guided light rays near to the maximum acceptance angle are selectively attenuated by the cladding material so that a somewhat reduced effective or “steady state” numerical aperture governs transmission for distances over 50 meters

**Applications:**

- Bio-Analytical Sensing
- Medical Laser
- Dental Curing
- Spectroscopy
- Nuclear Plasma Sensing
- Photodynamic Therapy

**Polymer Clad Fiber  
(Low & High OH)  
Anhydroguide™ (APC) & Superguide™ (SPC)**



**Fiber Type:**  
Step Index  
Multimode

**Fiber Type:** Anhydroguide™ Pure Fused Silica Core/Polymer Cladding - Step Index Multimode  
**Wavelength:** VIS-IR (Low OH): 300 nm - 2400 nm

**Fiber Construction:**  
Silica Core/  
Polymer Clad/  
Polymer Coated

**Trade Name:**  
Anhydroguide™  
VIS-IR (Low OH)  
300nm – 2400nm

Superguide™  
UV-VIS (High OH)  
190nm – 1250nm

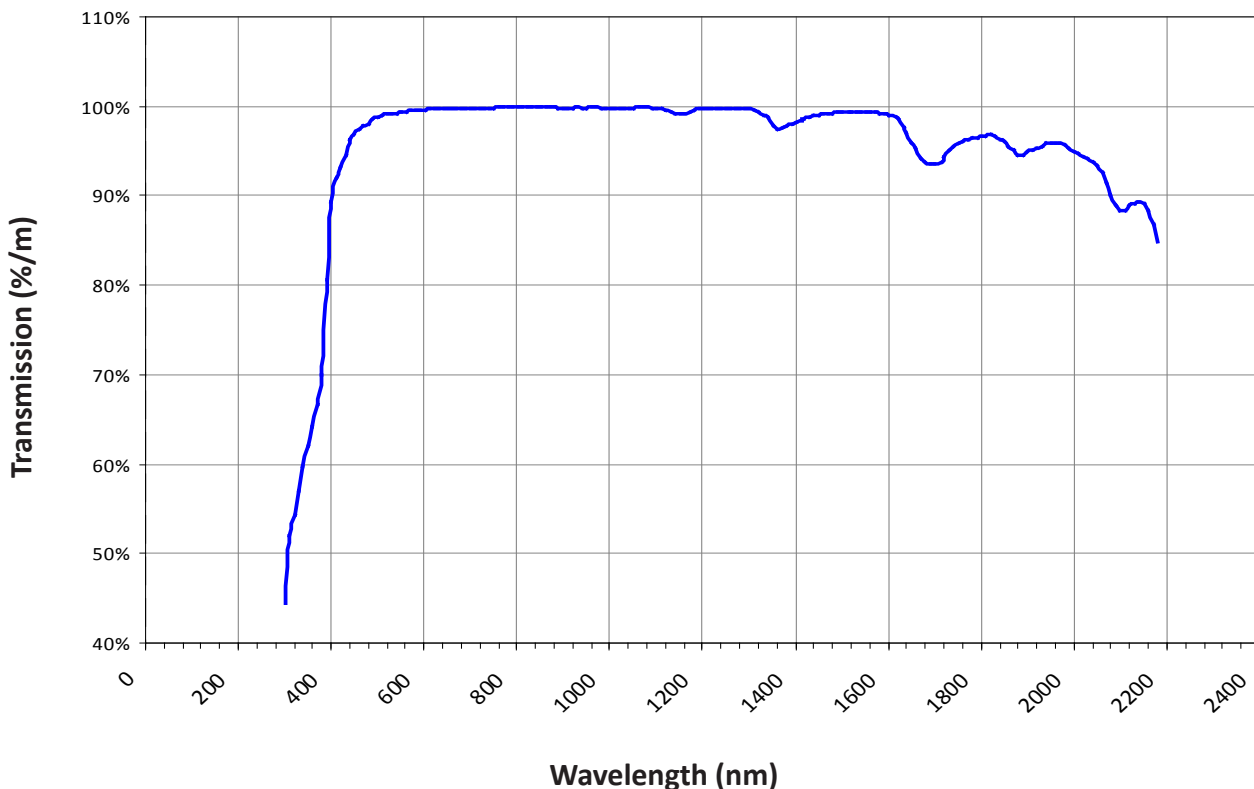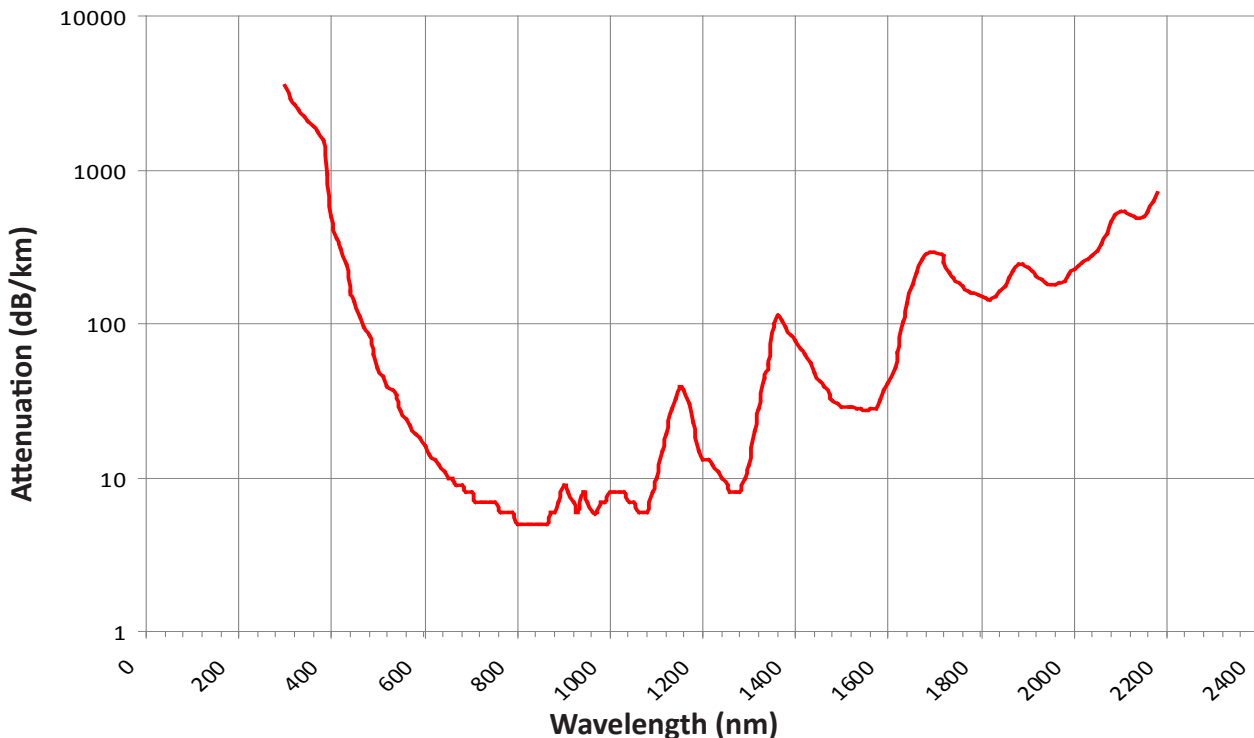



**Fiber Type:**  
Step Index  
Multimode

**Fiber Type:** Superguide™ Pure Fused Silica Core/Polymer Cladding - Step Index Multimode  
**Wavelength:** UV-VIS (High OH): 190 nm - 1250 nm

**Fiber Construction:**  
Silica Core/  
Polymer Clad/  
Polymer Coated

**Trade Name:**  
Anhydroguide™  
VIS-IR (Low OH)  
300nm – 2400nm

Superguide™  
UV-VIS (High OH)  
190nm – 1250nm

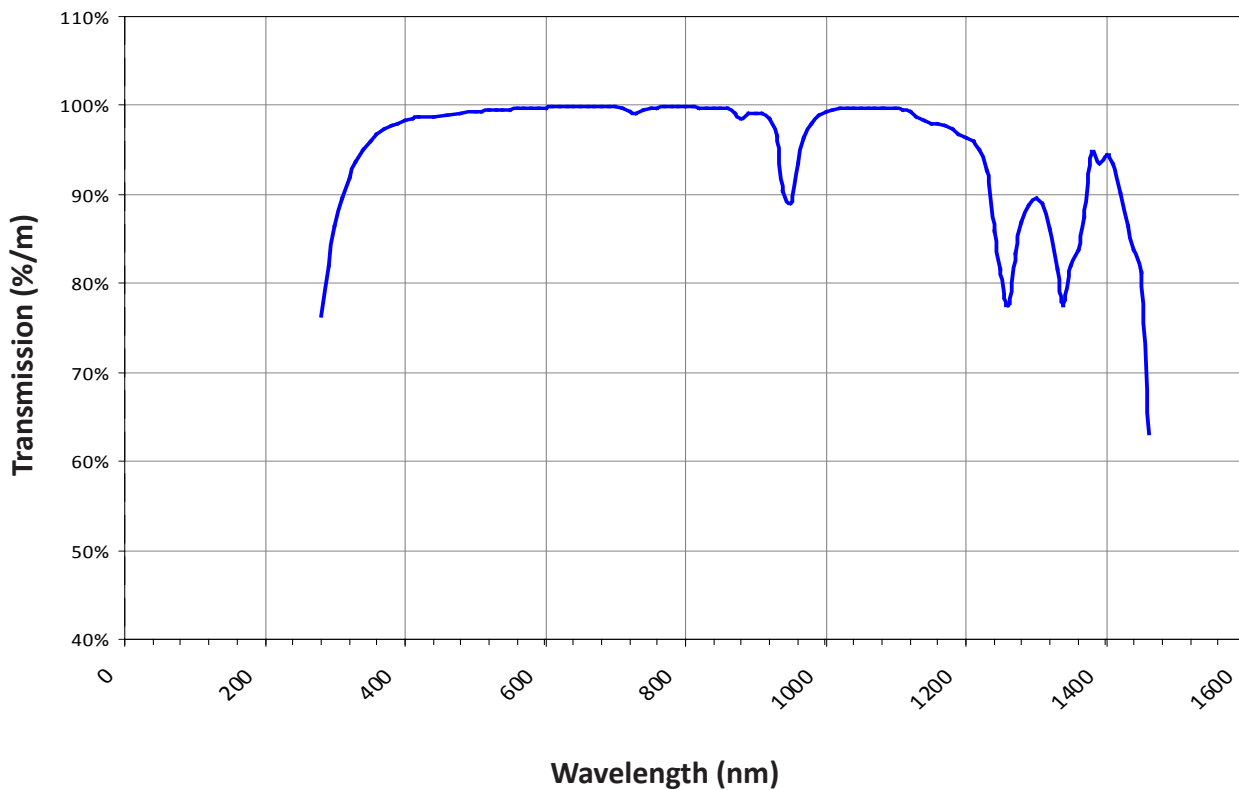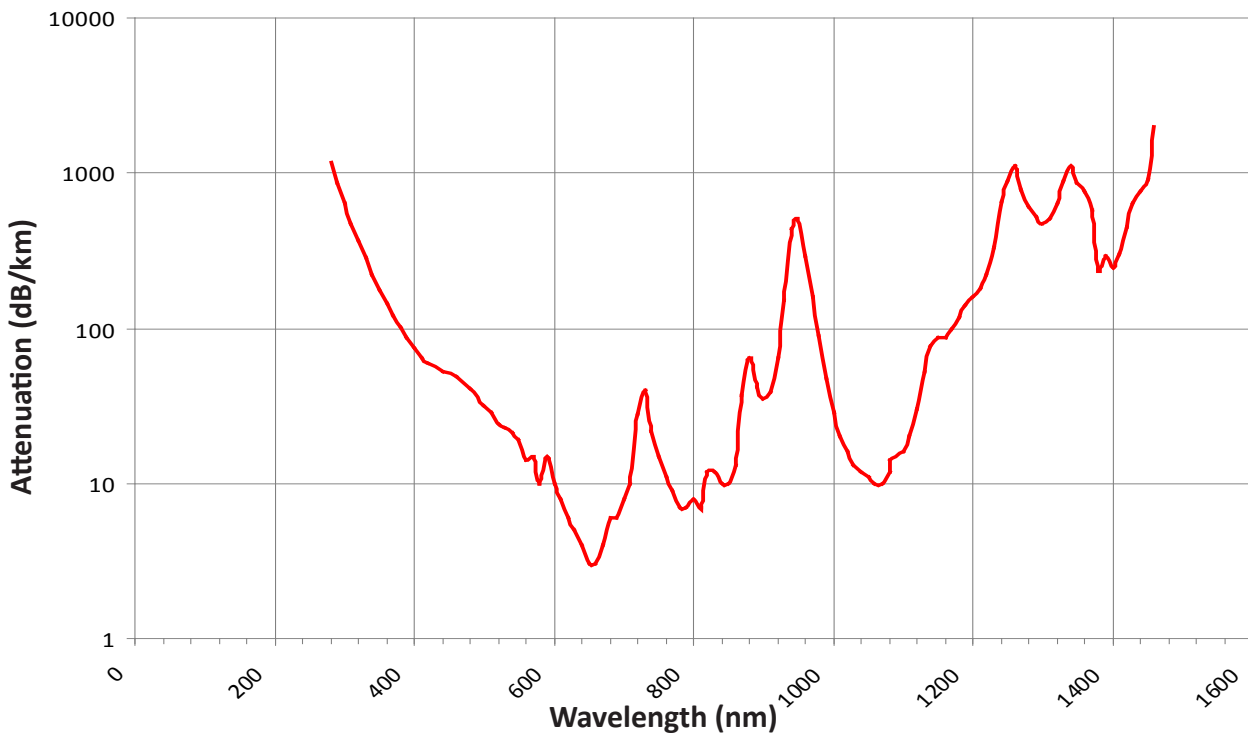

## Polymer Clad Fiber (Low & High OH) Anhydroguide™ (APC) & Superguide™ (SPC)

**Fiber Type:**  
Step Index  
Multimode

**Fiber**

**Construction:**  
Silica Core/  
Polymer Clad/  
Polymer Coated

**Trade Name:**  
Anhydroguide™  
VIS-IR (Low OH)  
300nm – 2400nm  
  
Superguide™  
UV-VIS (High OH)  
190nm – 1250nm

**Nylon Coating**

Temperature: -40°C to +100°C / -40°F to + 212°F

**Fiber Type:** Anhydroguide™ Silica Core/Polymer Cladding - Step Index Multimode

**Wavelength:** VIS-IR 300 nm - 2400 nm (Low OH)

**Numerical Aperture (NA):**

Standard: 0.37 ± 0.02 (Full acceptance Angle 43°)

**Proof Test:** 100 KPSI 4-Axis Bend Test

| Product Code       | Core Diameter (µm) | Cladding Diameter (µm) | Coating Diameter (µm) | Bend Radius Short Term/ Long Term (mm) |
|--------------------|--------------------|------------------------|-----------------------|--|
| APC200/300/370N    | 200 ± 4            | 300 ± 6                | 370 ± 19              | ≥ 20/40                                |
| APC300/400/500N    | 300 ± 6            | 400 ± 8                | 500 ± 25              | ≥ 30/60                                |
| APC400/500/600N    | 400 ± 8            | 500 ± 10               | 600 ± 30              | ≥ 40/80                                |
| APC600/700/800N    | 600 ± 12           | 700 ± 14               | 800 ± 40              | ≥ 60/120                               |
| APC800/900/1000N   | 800 ± 16           | 900 ± 18               | 1000 ± 50             | ≥ 80/160                               |
| APC1000/1100/1200N | 1000 ± 20          | 1100 ± 22              | 1200 ± 60             | ≥ 100/200                              |
| APC1500/1650/1800N | 1500 ± 30          | 1650 ± 33              | 1800 ± 90             | ≥ 150/300                              |
| APC2000/2150/2300N | 2000 ± 40          | 2150 ± 43              | 2300 ± 115            | ≥ 200/400                              |

**Nylon Coating**

Temperature: -40°C to +100°C / -40°F to + 212°F

**Fiber Type:** Superguide™ Silica Core/Polymer Cladding - Step Index Multimode

**Wavelength:** UV-VIS 190 nm - 1250 nm (High OH)

**Numerical Aperture (NA):**

Standard: 0.37 ± 0.02 (Full acceptance Angle 43°)

**Proof Test:** 100 KPSI 4-Axis Bend Test

| Product Code       | Core Diameter (µm) | Cladding Diameter (µm) | Coating Diameter (µm) | Bend Radius Short Term/ Long Term (mm) |
|--------------------|--------------------|------------------------|-----------------------|--|
| SPC200/300/370N    | 200 ± 4            | 300 ± 6                | 370 ± 19              | ≥ 20/40                                |
| SPC300/400/500N    | 300 ± 6            | 400 ± 8                | 500 ± 25              | ≥ 30/60                                |
| SPC400/500/600N    | 400 ± 8            | 500 ± 10               | 600 ± 30              | ≥ 40/80                                |
| SPC600/700/800N    | 600 ± 12           | 700 ± 14               | 800 ± 40              | ≥ 60/120                               |
| SPC800/900/1000N   | 800 ± 16           | 900 ± 18               | 1000 ± 50             | ≥ 80/160                               |
| SPC1000/1100/1200N | 1000 ± 20          | 1100 ± 22              | 1200 ± 60             | ≥ 100/200                              |
| SPC1500/1650/1800N | 1500 ± 30          | 1650 ± 33              | 1800 ± 90             | ≥ 150/300                              |
| SPC2000/2150/2300N | 2000 ± 40          | 2150 ± 43              | 2300 ± 115            | ≥ 200/400                              |